

FALCON's Response to Bluedart for the supply of Arm based VDS

December 3, 2024



www.falconautotech.com

Kind Attention –

Mr. Rahul Shettigar

M/s Bluedart

Offer Ref: F24-00118-01; Date 03.12.2024.

Subject – Techno -Commercial Offer for Arm VDS at Bhiwandi.

Dear Sir,

We are pleased to submit our Techno-Commercial Offer in response to your RFQ

As you will note, we have studied your challenges in current process, We have collected required details during the workshops and calls with you, we have put together a detailed technical proposal laid out in various sections and sequenced to enable you to understand our proposed solution and to re-enforce our commitment to be your partner in this strategic initiative.


In subsequent sections, we have highlighted the capabilities and experiences of Falcon Autotech with sections on our Automation Technologies and references.

To conclude, I would like to add my personal commitment, on behalf of Falcon Autotech. As we move through the RFP process, please do not hesitate to contact me and my team. We will be pleased to assist you for any further information or clarifications that you might have.

Contact Person : Adib Hasim
Title : Senior Manager Sales
Mobile : +91-9711619998
Email : Adib.hasim@falconautoonline.com

Company Name : Falcon Autotech Pvt. Ltd.
Regd. Office : 57, Nimri Colony, Double Storey Flats, Delhi – 110052
Website : www.falconautotech.com
LinkedIn : [linkedin.com/in/animesh-agarwal-94b40916](https://www.linkedin.com/in/animesh-agarwal-94b40916)

Solution of Arm based Volume distribution system – (CBS Bluedart, Bhiwandi)

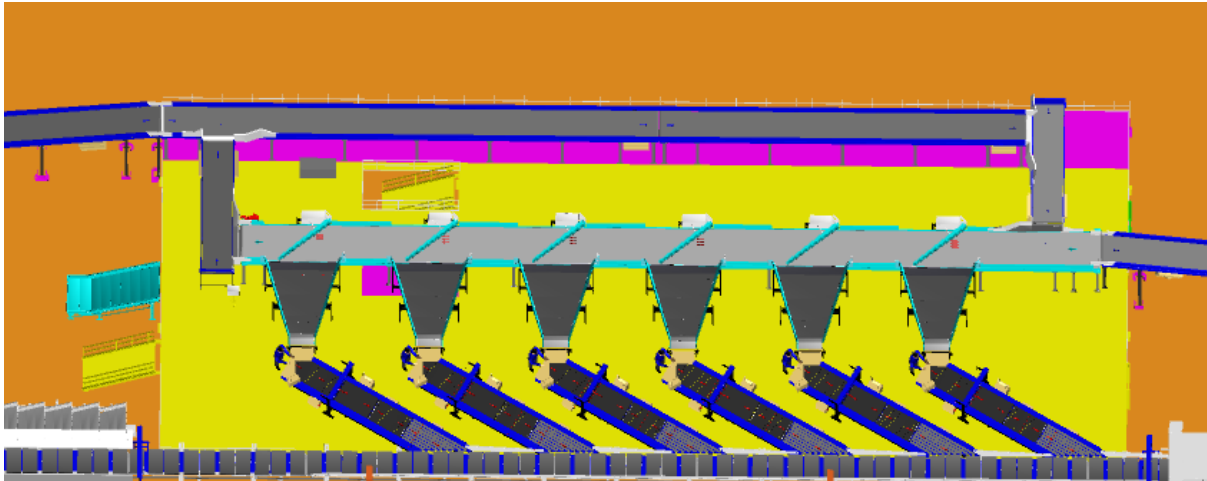

Proposal Reference – F24-00118-01

Falcon Autotech Private Limited
Plot No 308 & 309
Ecotech-1 Extension, Greater Noida
Uttar Pradesh- 201308
India.

Contact – Adib Hasim
Senior Manager Sales
Mob - +91 9711619998
Adib.hasim@falconautoonline.com


Contents

1. Proposed System Description	5
1.1 Objective	5
1.2 Summary of the System	5
2. Layout View	6
3. System description	7
3.1 Infeed Conveyor	7
3.2 VDS Conveyor	8
3.3 VDS Arm.....	8
3.4 VDS chutes	9
3.5 Additional Mezannine	9
4. Proposed System BOM.....	10
5. Project Timeline.....	10
6. Commercial Terms.....	11
6.1 Price Sheet	11
6.2 Payment Terms.....	11
7. Warranty Period	12
8. Exclusions	13

1. Proposed System Description

1.1 Objective


The purpose of this proposal is to present the design, manufacturing, installation, commissioning, of the Arm VDS for sorting parcel volume evenly into VDS chutes.

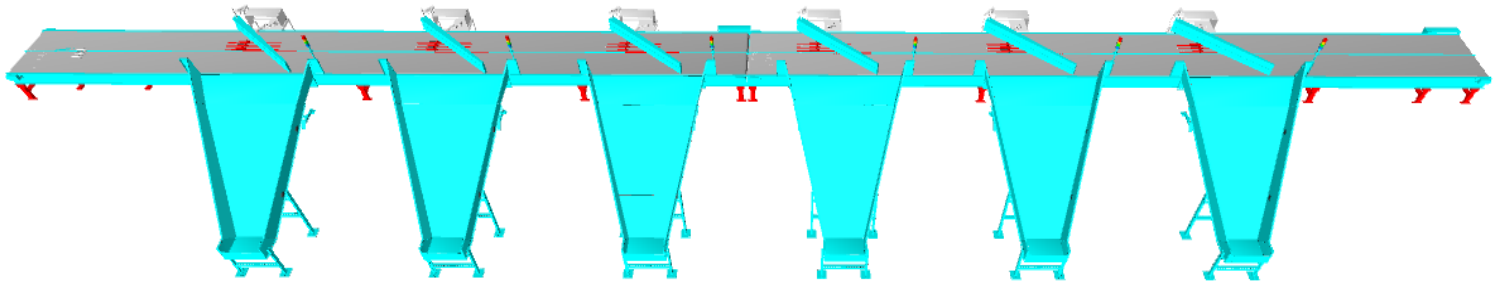

1.2 Summary of the System

1. Parcel loaded on infeed conveyor, reaches Arm based VDS for even volume distribution.
2. Once parcels are on modular belt of VDS, Arm will push infeed volume into respective VDS chutes evenly.

2. Layout View

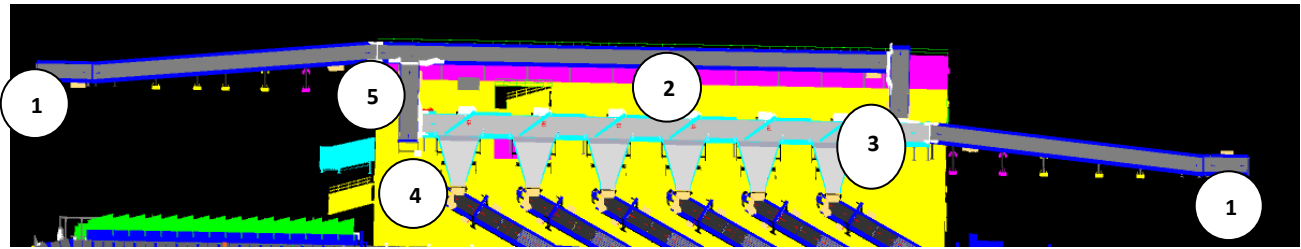


Legend

1. Infeed Conveyor
2. VDS Conveyor
3. VDS Arm
4. VDS Chutes
5. VDS Loop Conveyors


3. System description

3.1 Infeed Conveyor

In this solution Falcon will use existing PVC Belt Conveyor from VDS to increase the length of Inclined Conveyor. Remaining Conveyor will be used from the existing system .

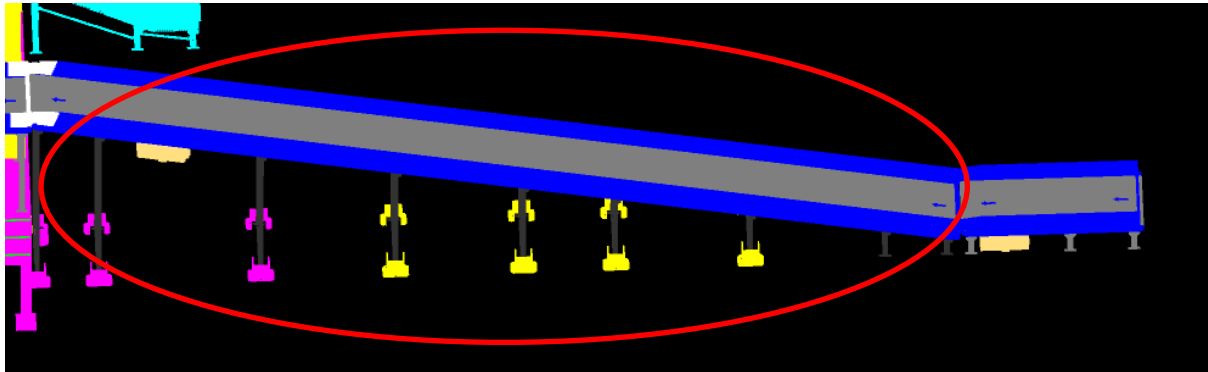


Infeed Conveyor Zone 1

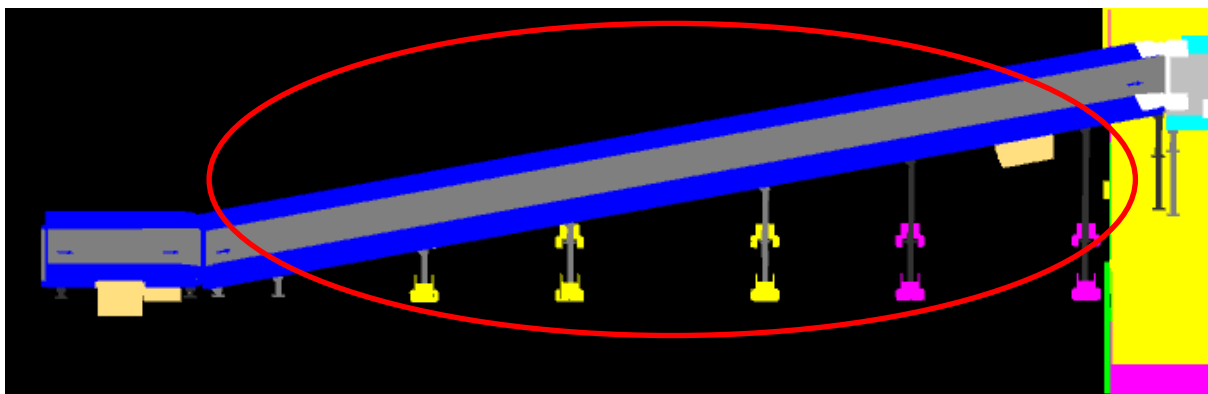

Infeed Conveyor Zone 2

3.2 VDS Conveyor

In this solution we have designed modular conveyor as VDS Conveyor. On VDS Conveyor Arm is installed to diver the shipment on the VDS Chute.

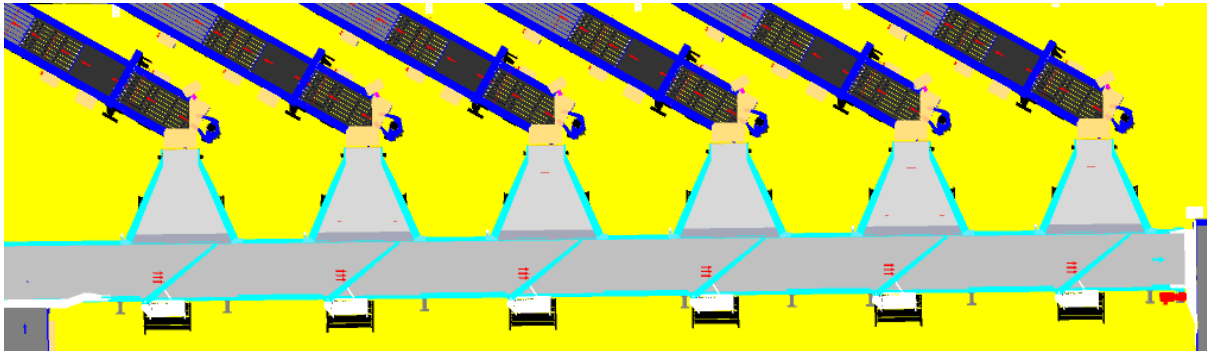

Note : To collect the non conveyable parcels trolley/bags would be in Bluedart Scope

3.3 VDS Arm


Linear Side Arm Diverter System of Falcon Autotech is an extremely cost-effective Sortation system designed for low to medium Volume Centres. Linear side arm diverter's simple and modular design gives it advantage of low cost, space saving, and modularity of increasing sorting points in future. This is one of the earliest diverter systems of Falcon Autotech.



Specification	3.0 ARM XL
Property	Value
Actuation method	Electric induction motor
Belt type	Flat top modular
Arm length (mm)	2400

3.4 VDS chutes


A VDS chute is a type of chute used for the smooth descent of materials or objects from an elevated position to a lower level (at an operator level). It utilizes base metal to guide and support the flow of items along the chute & collect the shipments within its area.

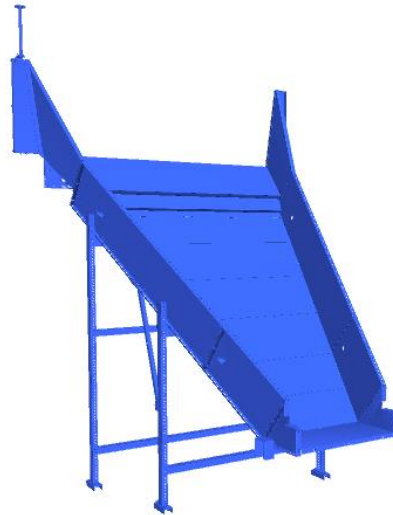

3.5 Additional Mezzanine

In this solution to place the conveyors an additional mezzanine is planned (as shown in below image with Pink Colour) and also the Staircase will be shifted as per the approved solution.

Mezzanine Area: 64 sq. metres

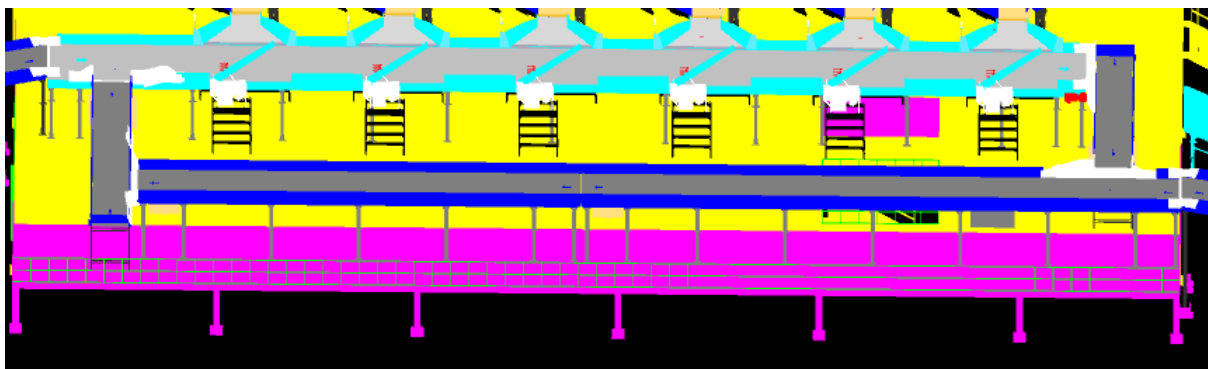

Note: Forklift/Tables/Lift etc required for the maintenance of conveyors and VDS Arms needs to be provide by Bluedart Team only.

4. Proposed System BOM

S.No	Component	Qty	Set	UOM
1	Modular Belt Conveyor	28	1	Metre
2	VDS Arm	6	1	No
3	VDS Chute	6	1	No
4	VDS Tower Light	6	1	No
5	VDS Chute Sensor	12	1	No
6	I/O for Sensor & Tower Light	6	1	No
8	Additional Mezzanine	64	1	Sq. Metres

Note: As this work also includes dismantling and reinstallation, so there could be possibility of additional component/material required during DAP/ Execution Stage. Same will be charged extra.

5. Project Timeline

S. No	Stage	Timeline
1	PO & Advance	Week 0
2	DAP Submission	Week 1-2
3	DAP Approval	Week 2-3
4	Manufacturing & Procurement	Week 16-18
5	Material Ready for Dispatch	Week 18-20
6	Delivery at Site	Week 19-21
7	Installation & Commissioning	Week 24-26

Note : Detailed Project Schedule and Handover Parameters will be shared during DAP Stage by the Falcon Team. Falcon will not deviate from the standard SOP for handover.

6. Commercial Terms

6.1 Price Sheet

S. No	Component	Set	Price (INR)
1	VDS System & Conveyor Modification	1	₹ 62,19,338
2	Mezzanine	1	₹ 9,32,000
3	Dismantling, Installation & Commissioning	1	₹ 7,15,134
4	Packaging & forwarding	1	₹ 1,78,783
5	Project Management and Engineering Charges	1	₹ 1,20,679
Total (INR)			₹ 81,65,934

The Total Price is to be understood.

- Freight- Excluded
- GST will be charged extra @ 18%
- Including Packing and Forwarding
- Dismantling, Installation and Commissioning: Included
- Price is valid for 30 days from the date of proposal.

*Material Unloading & Laydown area is in customer scope

6.2 Payment Terms

- 40 % Advance along with PO within 7 days.
- 50 % with 100% Taxes against Material Delivery at site
- 10% Against Installation & Commissioning*

**Beneficiary Use of System by client will be considered as completion of I&C .*

7. Warranty Period

Falcons offered System comes with a standard warranty of 1 year (Starts from the date of beneficiary use) and post completion of warranty, customer can opt for Extended warranty.

Warranty covers the following support:

- 24 X 7 Telephonic, Email and Remote Service Support when required.
- Regular Software updates and Bug Fixes.
- Supply of Mechanical and Electrical components in case of failure (excluding damages as mentioned in Exclusion Clause)

The warranty does not apply to replacement or repair of:

- Normal wear and tear.
- Consumables.
- Faulty articles continued:
 - Failure to comply with the manufacturer's recommendations (logistics documentation, Technical Information Note, retrofit document) and the rules of the trade.
 - Negligence or abnormal use of equipment.
 - Anomalies produced by an environment of use, storage or transport that does not comply with the specifications or recommendations of Falcon: packaging, temperature, hygrometry, sector, insulation, etc.
 - A defect due to a cause external to the supplies and services of Falcon.
- Equipment other than that supplied by Falcon.
- Items that can be repaired exclusively by Falcon that have been repaired or attempted repairs other than those carried out by Falcon.
- Items that fail due to normal wear and tear of one or more of its components or whose tamper-evident seals (varnish, strip, etc.) have been broken or whose serial numbers have been removed or modified.
- Items damaged during transport to Falcon due to the use of unsuitable packaging.

8. Exclusions

The scope of supply includes all parts which are defined in the Supplier's quotation.

All other parts which are not defined in the Supplier's quotation do not belong to the Supplier's scope of supply and are excluded. The following parts are also excluded:

- **Server PC & Server Rack**
- **Steel Works- If not specified**
- **Any material/component not mentioned in BOM**
- Building infrastructure; building structure, doors, fire exits, levelling devices, building extinguisher and fire alarm system, building heating and lighting system.
- Electrical power supply and wiring to the main control cabinets
- UPS for Controls and Drives
- Network Cabling up to the Main Server Rack
- Intermediate wiring to parts which are to be supplied by the Purchaser/others
- Emergency/Uninterruptable power supply
- Fire-alarm and fire protection devices
- Traffic and route markings
- Laydown Area
- Ram protection devices
- Cat walks, bridges, maintenance aisles and platforms
- Assembly tools like forklifts and hoisting machines
- All kind of network incl. Local Area Network (LAN/WLAN), exceeding the scope described in Scope of Supply
- Any Kind of Civil work
- Any adjustment of the Supplier's scope of supply to local rules and regulations
- X-Ray machines
- Roller cages/ Pallets
- **Simulation and 3D animation of the sorter system**
- Interface with other equipment not specified in this offer.
- Provision of facilities for the control room (furniture, air conditioning, heating, etc.).
- The supply and installation of fencing around the different corridors.
- Any item specifically indicated as not forming part of the subject matter of the Seller's supply in the offer documentation.